


The Prolink logo features the word "PROLINK" in a bold, white, sans-serif font. A white, curved line arches over the letters "O" and "L", and another white, curved line arches under the letters "I" and "N".

PROLINK

A close-up photograph of a network switch or patch panel. The device is a light-colored metal rack-mountable unit. It features multiple rows of blue RJ45 ports and fiber optic ports. Several yellow fiber optic cables are plugged into the ports. The scene is lit with dramatic, low-key lighting, with a bright yellow light source creating a strong lens flare and illuminating the cables and ports. The background is dark, making the illuminated components stand out.






We provide our customers with exceptional PRODUCTS in accordance with the highest international standards and also provide SERVICES that meets our customers' needs or exceeds their expectations.

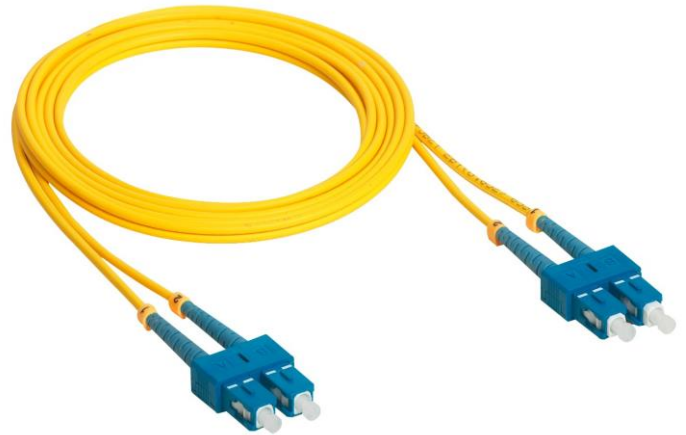
Powered by: The Prolink logo, consisting of the word "PROLINK" in a bold, white, sans-serif font, with a white, curved line arching over the "O" and "L", and another white, curved line arching under the "I" and "N".

Discription




ProLink F/O JUMPER CORD ,SC -SC-SM DUPLEX -5M

Features

-  Small Size, High Precision.
-  Zirconia 1.25mm ceramics ferrule.
-  Low insertion Loss.
-  High Return Loss.
-  Duplex are Available.



Applications

-  Telecom and Datacom Equipment.
-  LANWAN
-  Device Terminals

Speciations

Connectors type	SC-SC
Cable	SM Duplex 3.0 LSZH 5M
Fiber Type	SM 9/125
Cable Color	Yellow
insertion loss	-0.3 dB
return loss	≥45dB
joint endurance	> 1000Times
Operating Temperature	-40°C~+70°C
Storage Temperature	-25°C~+60°C
ROHS	Meet 2002/95/EC Requirement